

XEED
MULTIMEDIA PROJECTOR

Canon
Delighting You Always



NOTHING COMES CLOSER

SHORT-THROW VERSATILITY DISPLAYED IN BRIGHT CLARITY

Canon XEED WUX500ST is designed for unrivalled projections wherever you go. Even at short-distance installations, you can expect high image quality with minimal distortion. This versatile combination of high brightness and short-throw ratio with significant lens shift comes compact and lightweight, as portably functional as ever.



XEED WUX500ST
MULTIMEDIA PROJECTOR




DYNAMIC
SHORT-THROW



FLEXIBLE SETUP




DYNAMIC SHORT-THROW

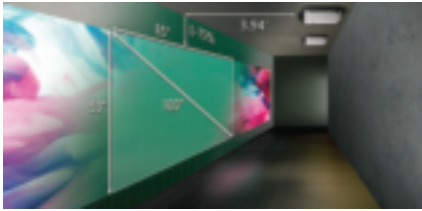

Short-throw ratio with significant lens shift delivers versatile installation choices. Museum and gallery visitors can get up-close to large artwork projections and videos without blocking the content.



FLEXIBLE SETUP

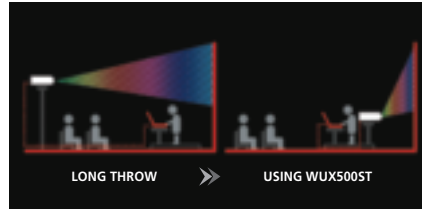

It can also fit comfortably behind a presenter to eliminate long cable runs. This simplifies the setup, prevents shadow casts and reduces any distracting glare from the projection.

PROJECTOR SPECIFICATIONS

PROJECTION SYSTEM	Imaging Device	0.71" LCOS Reflective Panels x 3
	Aspect Ratio	16:10
	Native Resolution	1920 x 1200 (WUXGA)
	Brightness*2	5000 Lumens (Normal) / 3460 Lumens (Power Saver)
	Contrast Ratio	2000:1 (Presentation Mode, Iris On)
	Uniformity	80%
	F Number, Focal Length	F2.7, 8.8 mm
	Electronic Zoom	12x Maximum
	Image Size*3	30" – 300"
	Lens Shift	V: 0 – 75%, H: ± 10%
	Digital Keystone	V: ± 12°, H: ± 12°
Throw Ratio*1	0.56:1	
IMAGE ADJUSTMENTS	Image Modes	Standard / Presentation / Dynamic / Photo / sRGB / Video / User1 / User2 / User3 / User4 / User5
	Colour Adjustment	Colour Level, Colour Balance, Colour Temperature, Gain (R, G, B), Offset (R, G, B)
	Screen Colour Correction	Normal, Green Board, Adjust
	Mounting	Upward, Downward, Table, Ceiling
	Adjustable Feet	Bottom Front: 2 places (Maximum Elevation 6°)
IMAGE SIGNALS	Scanning Frequency	H: 15.734 kHz – 75.000 kHz, V: 24.000 Hz – 60.317 Hz
	Analog PC Input	WUXGA / UXGA / WSXGA+ / SXGA+ / WXGA+ / FWXGA / WXGA / SXGA / XGA / SGA / VGA
	Digital PC Input	WUXGA / UXGA / WSXGA+ / SXGA+ / WXGA+ / FWXGA / WXGA / SXGA / XGA / SGA / VGA
	Component Video Input	1080p / 1080i / 720p / 576p / 576i / 480p / 480i
	Digital Video Input	1080p / 1080i / 720p / 576p / 480p
	Dot Clock	162 MHz (Maximum)
	HDBaseT™	Equivalent to the Input Signals for HDMI Terminal
	USB Data Transfer	JPEG Still Images Only

TERMINALS	DVI-I	Digital PC / Analog PC Input
	HDMI	Digital PC / Digital Video Input
	RJ-45	Network Connection (1000BASE-T / 100BASE-TX / 10BASE-T)
	RJ-45 (HDBaseT™)	HDBaseT™ Input (Image, Audio, Control Signal and Network)
	Dsub15	Analog PC / Component Video Input
	Dsub9 (Control)	RS-232 Connection
	USB Type A	USB Connection
	Mini Jack	Audio Input x 2, Audio Output x 1
	Mini Jack (Remote)	Wired Remote Control Connection
	REMOTE CONTROL	Wireless Remote
BUILT-IN SOUND	Internal Amplifier	5 W, Monaural
LAMP	Type	Super High Pressure Lamp
	Life	3000 H / 5000 H
	Lamp Power*2	280 / 200 W
RATING	Fan Noise*2	38 / 30 dB
	Power Consumption*2	395 / 295 W
	Standby Power*4	1.8 – 0.2 W
	Power Voltage	AC100 – 240 V : 50 / 60 Hz
	Operating Temperature	0°C – 40°C, 20%RH – 85%RH
	Storage Temperature	-20°C – 60°C
	Dimensions (W x H x D)	W: 337 mm, H: 136 mm, D: 415 mm
Weight	6.3 kg	

*1 Calculated value for 100" image. *2 Lamp mode is Full power / Power saver. Brightness in Power saver mode is only a calculated value and is not guaranteed as specification. *3 Indicates projectable range, although the optical performance is guaranteed from 50 – 200 inches. *4 Varies depending on the combination of the HDBaseT™ and network settings.

This document is for information only and the contents are subject to change without notice. Errors and omissions excepted. Images are simulated. Weight and dimensions are approximates. Nothing in this document should be construed as a warranty. Product/Service options, name and availability may vary by region. We expressly disclaim any liability or contractual obligations with respect to this document. Canon, among others, is the trademark of Canon Inc. and/or its affiliates. Other names, marks and logos contained in this document may be the registered trademarks or trademarks of their respective owners.

WHAT'S IN THE BOX

Projector, Lens Cap, Power Cord, VGA to VGA Connection Cable (Mini Dsub15-Mini Dsub15), Projector Remote Control RS-RC06 (includes two AA batteries), Quick Start Guide (Book), User's Manual (CD-ROM), Warranty Card

ACCESSORIES ITEMS

Projector Remote Control RS-RC06, Projector Remote Control (Wired) RS-RC05, Ceiling Mount RS-CL16, Ceiling Extension RS-CL08 (16" – 24"), Ceiling Extension RS-CL09 (24" – 39"), Replacement Lamp RS-LP08, Replacement Air Filter RS-FL02, Optional Feet RS-FT01 (Pack of Four)

Canon Offices

HONG KONG
Canon Hongkong Co. Ltd.
Tel: 852-3191-2388
Fax: 852-2369-3800
www.canon.com.hk

INDIA
Canon India Pvt. Ltd.
Tel: 91-124-4160000
Fax: 91-124-4160011
www.canon.co.in

MALAYSIA
Canon Marketing (Malaysia) Sdn. Bhd.
Tel: 60-3-78446000
Fax: 60-3-78477222
www.canon.com.my

PHILIPPINES
Canon Marketing (Philippines), Inc.
Tel: 632-884-9090
Fax: 632-812-0067
www.canon.com.ph

SINGAPORE
Canon Singapore Pte. Ltd.
(Domestic Operations)
Tel: 65-6799-8888
Fax: 65-6799-8882
www.canon.com.sg

THAILAND
Canon Marketing (Thailand) Co. Ltd.
Tel: 662-344-9988
Fax: 662-344-9861
www.canon.co.th

VIETNAM
Canon Marketing Vietnam Co. Ltd.
Ho Chi Minh City Hanoi
Tel: 848-38200-466 Tel: 844-37711-677
Fax: 848-38200-477 Fax: 844-37711-678
www.canon.com.vn

Canon Business Partners

BANGLADESH
J.A.N. Associates Ltd.
Tel: 880-2-9660601
Fax: 880-2-8610410

BRUNEI
Interhouse Company Sdn. Bhd.
Tel: 673-2-653001
Fax: 673-2-653003

CAMBODIA
I-Click (Cambodia) Pte. Ltd.
Tel: 855-23-996638
Fax: 855-23-996639

INDONESIA
PT Datascrip
Canon Call Center
Tel: 62-21-29226000
Fax: 62-21-6544811 to 13
www.canon.co.id


MALDIVES
SIMDI Company (Pvt) Ltd.
Tel: 960-3334421
Fax: 960-3334424

MYANMAR
Myanmar Golden Rock International Co., Ltd.
Tel: 001-95-1654810 to 654819
Fax: 001-95-1654820

NEPAL
International Electronics Concern (P) Ltd.
Tel: 977-1-4221991
Fax: 977-1-4221909

PAKISTAN
Shirazi Trading Co. (Pvt) Ltd.
Tel: 92-21-32417737, 32417746
Fax: 92-21-32417747

SRI LANKA
Metropolitan Office (Pvt) Ltd.
Tel: 94-114-700-200
Fax: 94-114-700-267

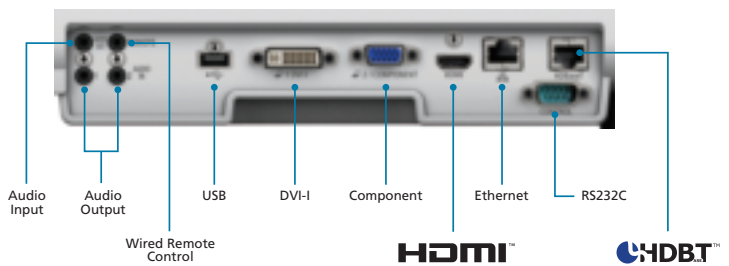

Dealer's Stamp

Canon

**SOUTH & SOUTHEAST ASIA
REGIONAL HEADQUARTERS**

CANON SINGAPORE PTE. LTD.
1 Fusionopolis Place,
#15-10 Galaxis, Singapore 138522

www.canon-asia.com